



RSM series Single-Acting Low Weight Cylinder

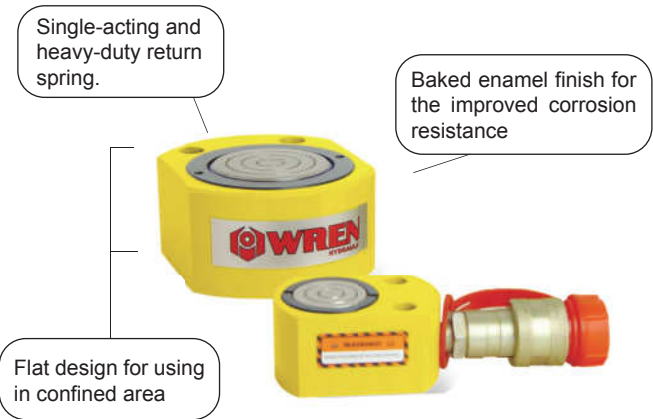


Capacity:5~150Ton
 Stroke:6~16mm
 Maximum Operating Pressure:700bar

RSM Series Selection Chart

Capacity (Ton)	Stroke (mm)	Model	Min Height (mm)	Outside Diameter (mm)	Effective Area (cm ²)	Oil Capacity (cm ³)	Saddle Diameter (mm)	Weight (Kg)
5	6	RSM50	32	59 × 42	7	4	26	1.0
10	11	RSM100	42	83 × 56	14.5	16	38	1.4
20	11	RSM200	51	100 × 75	28.2	31	50	3.1
30	13	RSM300	58	118 × 95	41.8	54	63	4.5
50	16	RSM500	66	140 × 115	63.6	101	70	6.8
75	16	RSM750	79	166 × 140	103.8	166	63	11.3
100	16	RSM1000	85	178 × 153	132.7	212	75	14.5
150	16	RSM1500	100	216 × 191	201	321	112	26.3

RCS series Single-Acting Low Weight Cylinder



Capacity:10~150Ton
 Stroke:38~62mm
 Maximum Operating Pressure:700bar

RCS Series Selection Chart

Capacity (Ton)	Stroke (mm)	Model	Min Height (mm)	Outside Diameter (mm)	Effective Area (cm ²)	Oil Capacity (cm ³)	Saddle Diameter (mm)	Weight (Kg)
10	38	RCS101	88	70	14.5	55	38	4.1
20	45	RCS201	98	92	28.2	127	50	5.0
30	61	RCS302	117	102	41.8	255	65	6.8
50	60	RCS502	122	127	63.6	381	70	10.9
100	57	RCS1002	141	167	132.7	756	90	22.7
150	51	RCS1502	206	205	201.1	1025	138	42.1