


Hydraulic Torque Wrench Pump

Electric Pump LP3 series

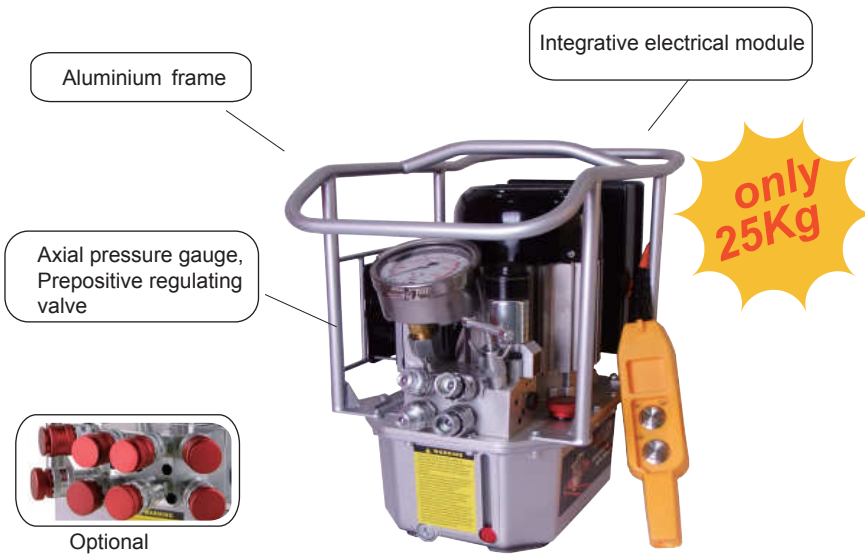

WREN can make the special length of remote control wire according customers' requirement (WREN standard: 6 meters).

Parameter

Model	LP3-2	LP3-4
Operating wrench	2	4
Tank capacity	5.5L	5.5L
Flow(low-mid-High)	7-1.6-0.8 L/min	7-1.6-0.8 L/min
Output pressure	70~700bar	70~700bar
Source of power	220V/50HZ	220V/50HZ
Power	1.1KW	1.1KW
Weight	25Kg	27Kg
Volume	305x445x426mm	305x465x426mm

- Compact automatic three stage design.
- Applicable on one or two wrenches simultaneously.
- Aluminum oil tank with gauge.
- Have $\Phi 100$ high pressure gauge.
- Infinitely variable pressure adjustment between 70~700 bar.
- With the high efficiency radiator the pump can work 24 hours continuously.
- Can change the motor to fit the different voltage.
- Optional components(FP4), can operate four wrenches at the same time

Air Pump LP3-N series

Parameter

Model	LP3-N2	LP3-N4
Operating wrench	2	4
Working pressure	700 bar	700 bar
Air pressure(Input)	4-8 bar	4-8 bar
Power	3.0 KW	3.0 KW
Tank capacity	5.5L	5.5L
Flow rate (low-mid-high)	8.6-2.2-1.1 L/min	8.6-2.2-1.1 L/min
Oil cooler	N/A	N/A
Weight	22Kg	24Kg
Oil outputs	4x1/4" NPT	8x1/4" NPT
LxWxH(mm)	442x282x377mm	460x282x377mm



- Compact three-stage pump
- The Single valve block can be replaced by component FP4, there by allowing 2 or 4 Tools to be driven simultaneously.
- Three stage with air drive.
- Supporting continuous operation with steel frame.
- 4" diameter gauge, aluminium oil tank with oil level indicator
- Variable pressure adjustment between 70~700 bar
- Designed for continuous operation

