

28P series High Pressure Hydraulic Hand Pump(2800Bar)

28P Series Hand Pump Selection Chart

Type	28P80	28P160
Work Pressure Mpa (Low/Hi)	2.0/280	2.0/280
One Stroke Oil ml (Low/Hi)	32/0.9	32/0.9
Full Tank Oil L	2.26	3.58
Available Oil L	1.98	3.24
Size (A-B-C)	636/120/170	636/140/190
Oil interface	1/4"BSP	1/4"BSP
Gauge interface	1/2"BSP	1/2"BSP
Weight	8.5	10.5



Equipped with a pressure regulating valve, to adjust the output pressure.(Max Pressure 2800bar)






Aluminum titanium alloy corrosion resistance, high strength, light weight, impact resistance, adapt to a variety of harsh environment.

The built-in high and low pressure switching valve, low pressure high flow rate output.



28P-series high hydraulic hand pumps are designed for high hydraulic equipment. Its pressure anew to 2800bar, and customers can order every size of oil tank for different equipment. WREN serves a wide range accessory for this series. These products which are designed for serving true resolutions, entitled with TUV seal result of an effort with appropriate directives.

Ahead Pump Configure

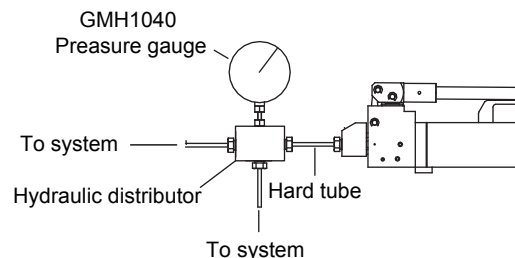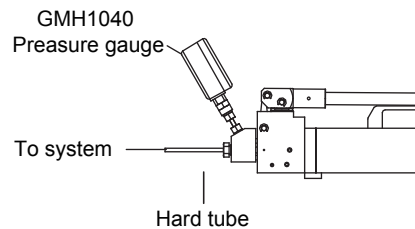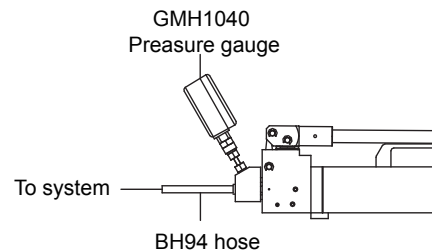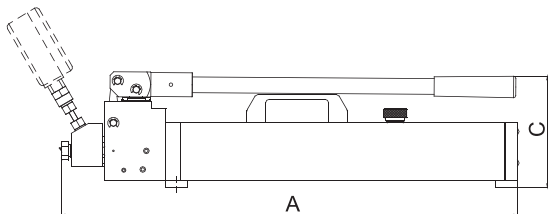

Spinal seal
Stainless steel high pressure joint seal in the spinal joints, with nut casing and pipe are tightly locked in the spinal canal surface to provide a 2800bar sealed. In order to achieve safety and stability requirements

