


for cone wheels

m - 3

m - 4

m - 4P

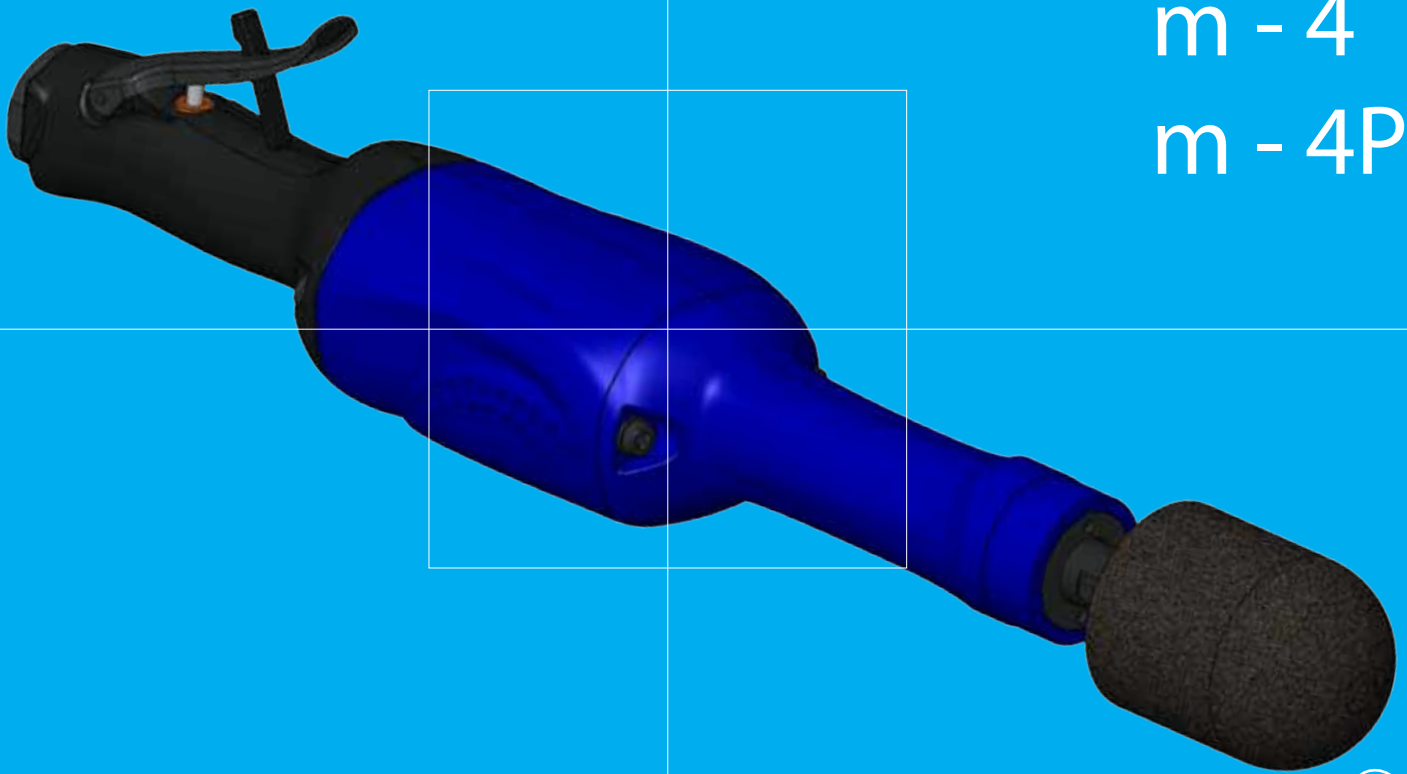

Oil free



Model		Max. free speed r/min	Recommended / max. dia. cone wheel (50 m/s)	Max. power kW	Weight kg	Lenght mm	Rec. hose dia. mm	Air inlet thread
Straight for cone wheels								
GSB31 S18 CW	Banko M3 Straight	18000	40/50	2.0	2.2	440	13	1/2
GSB31 S15 CW	Banko M3 Straight	15000	50/63	1.9	2.2	440	13	1/2
GSB41 S12 CW	Banko M4 Straight	12000	63/80	3.1	2.9	435	16	1/2
GSB41 S10 CW	Banko M4 Straight	10000	80/100	3.0	2.9	435	16	1/2

Adapter for cone wheels with thread M10, M12, M16 od 5/8 UNC must be specified in order