


Die extended

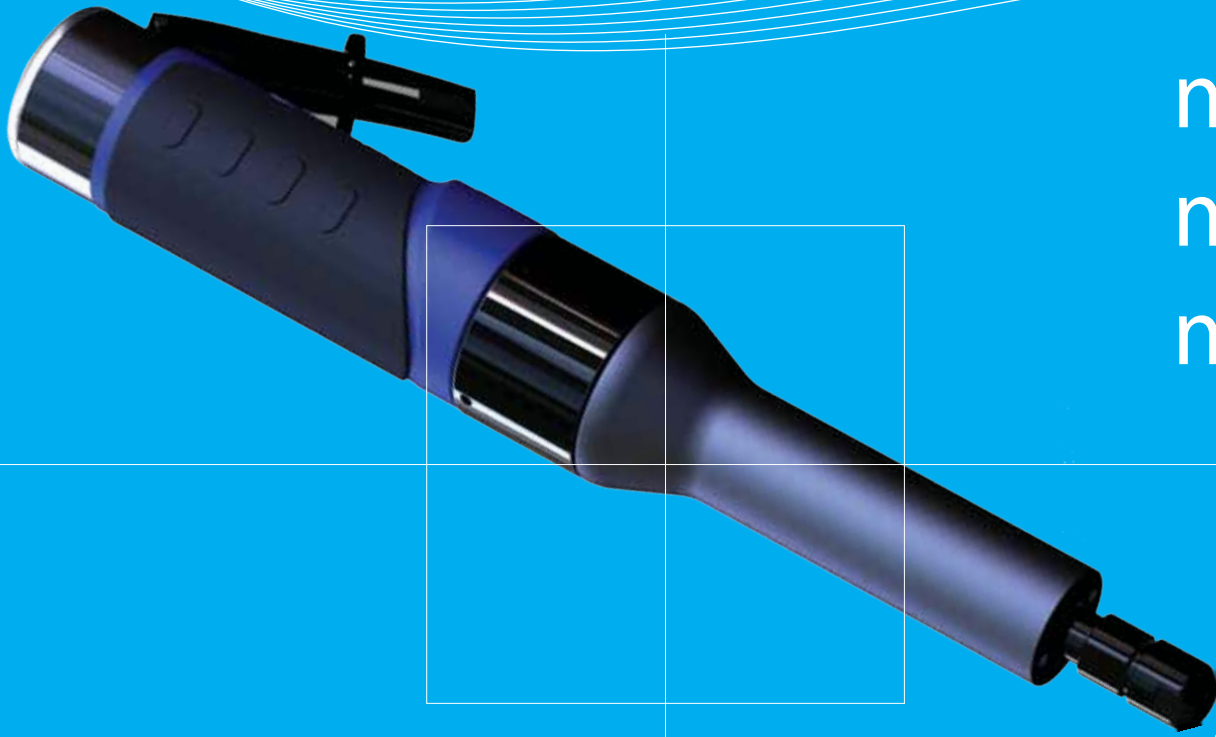

m - 0

m - 1

m - 3

oil free

Model	Die extended collet type	Max. free speed r/min	Collet diametar	Recomended / max. dia.		Max. power kW	Weight kg	Lenght mm	Rec. hose dia. mm	Air inlet thread
				Carbide burr	Mounted point					
GDB01 E25 CE	Banko M0 DIE Extended	25000	6/8	12/16	20/25	0.75	1.0	322	10	3/8
GDB01 E18 CE	Banko M0 DIE Extended	18000	6/8	12/16	20/25	0.75	1.0	322	10	3/8
GDB11 E25 CE	Banko M1 DIE Extended	25000	6/8	12/16	25/32	1.4	1.5	372	10	1/2
GDB11 E18 CE	Banko M1 DIE Extended	18000	6/8	16/16	32/40	1.3	1.5	372	10	1/2
GDB31 E25 CE	Banko M3 DIE Extended	25000	6/8	16/16	25/32	2.0	2.2	394	13	1/2
GDB31 E18 CE	Banko M3 DIE Extended	18000	6/8	16/16	32/40	2.0	2.2	394	13	1/2

Collet size 8 mm available on request

Model	Die extended for cone wheel	Max. free speed r/min	Spindle thread	Recomended / max. dia.		Max. power kW	Weight kg	Lenght mm	Rec. hose dia. mm	Air inlet thread
				cone wheel (50 m/s)						
GDB11 E25 CW	Banko M1 DIE Extended	25000	M12x1	32/40		1.4	1.5	346	10	1/2
GDB11 E18 CW	Banko M1 DIE Extended	18000	M12x1	40/50		1.3	1.5	346	10	1/2
GDB31 E25 CW	Banko M3 DIE Extended	25000	M12x1	40/40		2.0	2.2	372	13	1/2
GDB31 E18 CW	Banko M3 DIE Extended	18000	M12x1	50/50		2.0	2.2	372	13	1/2

Adapter for cone wheels with thread M10, M12, M16 od 5/8 UNC must be specified in order

Model	Die extended for straight wheel	Max. free speed r/min	Spindle thread	Recomended / max. dia.		Max. power kW	Weight kg	Lenght mm	Rec. hose dia. mm	Air inlet thread
				straight wheel (80 m/s)						
GDB11 E25 SW	Banko M1 DIE Extended	25000	UNC 1/2x55	50/63		1.4	1.5	373	10	1/2
GDB11 E18 SW	Banko M1 DIE Extended	18000	UNC 1/2x55	63/80		1.3	1.5	373	10	1/2
GDB31 E25 SW	Banko M3 DIE Extended	25000	UNC 1/2x55	63/63		2.0	2.2	398	13	1/2
GDB31 E18 SW	Banko M3 DIE Extended	18000	UNC 1/2x55	80/80		2.0	2.2	398	13	1/2

Adapter for straight wheels with size of wheel must be specified in order